

# 2-way Control Valves type G2F

2.5.04-F

Nodular cast iron, 2 seats, PN 25, DN 20 – 80 mm, Flanged ends

GB-1

## Characteristics

- Nominal pressure PN 25
- Regulating capability  $\frac{k_{vs}}{k_{vr}} > 25$
- Double-seated
- Adjustable seat interspace
- Quadratic characteristic

## Applications

Control valves type G2F are designed for regulating hot water, steam and hot oil systems.

The double-seated valves are used in installations where the system pressure necessitates a closing force greater than available in the actuator programme for a single-seated valve.

The valves are used in conjunction with our temperature or pressure differential regulators for controlling industrial processes, district or central heating plants or marine installations.

## Dimensioning

For sizing of control valves and selection of actuators please see "Quick Choice" leaflet no. 9.0.00.

## Design

The valve components - spindle, seats and cone - are made of stainless steel. The valve body is made of nodular cast iron EN-GJS-400-15 with flanges drilled according to EN 1092-2. The thread for the actuator connection is G1B ISO 228. The valves are double-seated and designed for tight closure. The leakage rate is less than 0.5% of the full flow (according to VDI/VDE 2174).

## Quality assurance

All valves are manufactured under an ISO 9001 certification, and are pressure and leakage tested before shipment. For marine applications the valves can be supplied with relevant test certificates from recognized classification societies.

## Function

Without the actuator being connected, the valve is held in open position by means of a spring. With pressure on the spindle the valve will close.

In connection with our thermostats or electronic actuators, the valves will close at rising temperatures. For cooling circuits a reverse acting valve can be used.

The quadratic characteristic will not cease, until the flow has dropped below 4% of the full flow.



## Technical data

Materials:

- Valve body Nodular cast iron EN-GJS-400-15

- Components Stainless steel

- Nuts, bolts 24 CrMo 5/A4

Nominal pressure PN 25

Seating Double-seated

Valve characteristic Quadratic

Regulating capability  $\frac{k_{vs}}{k_{vr}} > 25$

Leakage rate  $\leq 0.5\%$  of  $k_{vs}$

Temperature range See pressure/temperature diagram


Mounting See page 2

Flanges drilled

according to EN 1092-2 PN 25

Counter flanges DIN 2634

Colour Blue

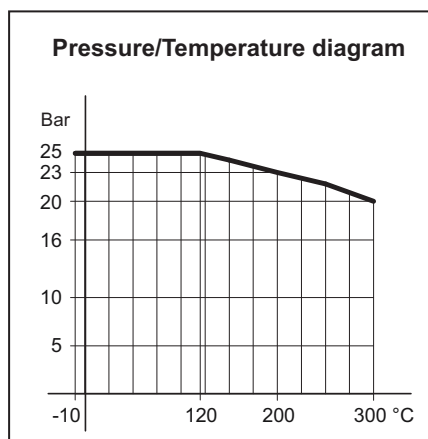

## Specifications

Type	Flange connection DN in mm	Opening mm	$k_{vs}$ -value m <sup>3</sup> /h	Lifting height mm	Weight kg
20 G2F	20	20	5	6.5	5
25 G2F	25	25	7.5	7	6.5
32 G2F	32	32	12.5	8	9
40 G2F	40	40	20	9	11
50 G2F	50	50	30	10	16
65 G2F	65	65	50	11	21
80 G2F	80	80	80	13	38

Subject to changes without notice.

### Definition of kvs-value

The  $k_{vs}$ -value is identical to the IEC flow coefficient  $k_v$  and defined as the water flow rate in  $m^3/h$  through the fully open valve by a constant differential pressure,  $\Delta p_v$ , of 1 bar.

### Mounting

Up to 170°C the valve can be installed vertically as well as horizontally. For media temperature above 170°C, a cooling unit of type KS has to be applied. It must then be installed with actuator/thermostats downwards, and according to the following instructions:


Valve temperature	Cooling unit	Suitable for
170°C - 250°C	KS-4	All actuators
250°C - 300°C	KS-5	Thermostats
250°C - 300°C	KS-6	Valve Motors

### Strainer

It is recommended to use a strainer in front of the control valve if the liquid contains suspended particles.


### Accessories

#### Manual adjusting device




The device has a built-in stuffing box. For sealing and manual operation of valves when an actuator has not been fitted, e.g. during periods of construction.

#### Cooling unit KS-4




Cooling unit protecting the stuffing box of the motor/thermostat. To be applied at valve temperatures between 170°C and 250°C.

#### Cooling unit KS-5



Cooling units with built-in bellow glands, replacing stuffing box of thermostat (KS-5) or valve motor (KS-6). Must be applied at valve temperatures above 250°C.

#### Cooling unit KS-6

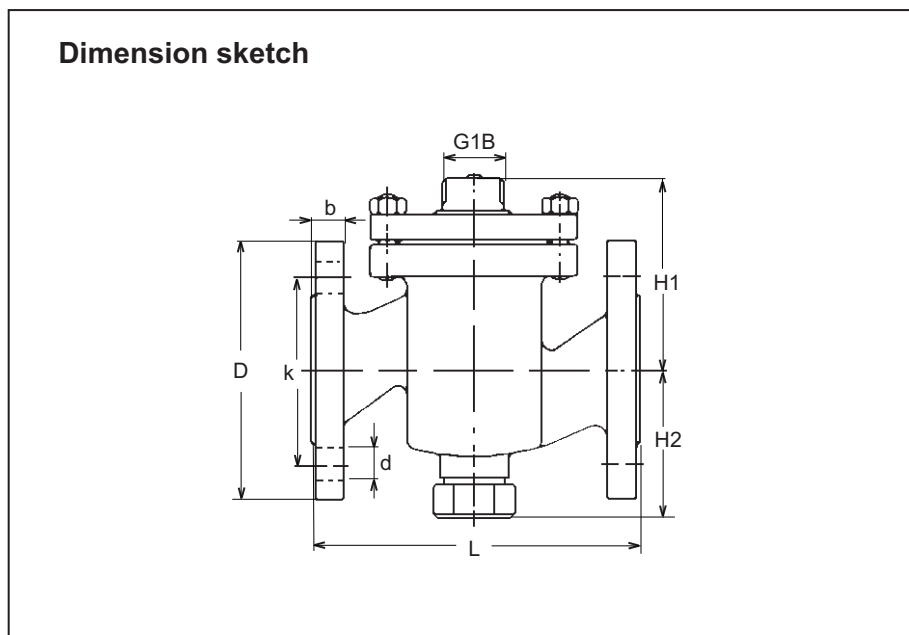

Dimensions							
Type	L mm	H1 mm	H2 mm	D (dia.) mm	b mm	k (dia.) mm	d mm dia. (number)
20 G2F	150	85	70	105	16	75	14x(4)
25 G2F	160	95	77	115	16	85	14x(4)
32 G2F	180	105	82	140	18	100	19x(4)
40 G2F	200	110	92	150	19	110	19x(4)
50 G2F	230	125	102	165	19	125	19x(4)
65 G2F	290	135	120	185	19	145	19x(8)
80 G2F	310	145	130	200	19	160	19x(8)

Subject to changes without notice.