


KH 3/2-Wege Kompakt BSPP Kugelhahn Stahl


Zöll. Innengewinde (ISO 1179-1) / Zöll. Innengewinde (ISO 1179-1) /
Zöll. Innengewinde (ISO 1179-1)

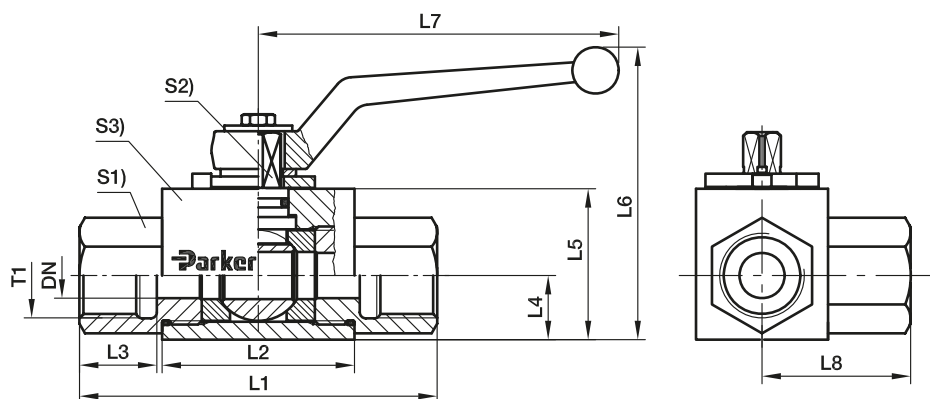

T1	DN	L1	L2	L3	L4	L5	L6	L7	L8	S1	S2	S3	Gewicht g/1 St.	Bestell- zeichen*	PN (bar) ¹⁾
G 1/8	4	69	36	12	15,0	30	55	76	34,5	19	7	30	270	KH3/2-1/8X	500
G 1/4	6	69	36	12	15,0	30	55	76	34,5	19	7	30	342	KH3/2-1/4X	500
G 3/8	10	73	45	14	14,5	35	68	100	36,5	24	8	40	563	KH3/2-3/8X	500
G 1/2	12	82	51	15	22,0	45	92	112	41,0	30	10	45	932	KH3/2-1/2X	500
G 3/4	20	93	60	18	29,0	60	113	187	48,0	41	14	55	1724	KH3/2-3/4X	400
G 1	25	118	70	20	31,0	65	118	187	56,5	50	14	65	2643	KH3/2-1X	400

¹⁾ Druckwert genannt = Artikel lieferbar

$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

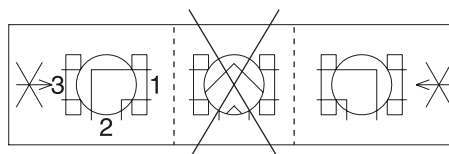

L-Version

Bestellzeichen-Ergänzungen			
Material	Kennbuchstaben Oberfläche und Material	Beispiel	Standard- Dichtungswerkstoff (keine zusätzl. Kenn- buchstaben erforderlich)
Stahl, verzinkt, Cr(VI)-frei	CF	KH3/2-1/8CFX	POM / NBR
Stahl	DIN 50938-FE//A/T4	KH3/2-1/8X	POM / NBR